

CLARK

MARCH 2024





IMAGE MANUAL

TABLE OF CONTENTS

- 1. Cover
- 2. Table of Contents
- 3. Clark Color Standards
- 4. Image Install Photo Validation
- 5. Image Partners
- 6. Image Process Summary
- 7. Image Conversion Scope Of Work
- 8. What It Takes To Become A Clark Store
- 9. What It Takes To Become A Clark Store
- 10. General Site Treatment
- 11. Canopy Fascia Elevations
- 12. Canopy Logo Placement
- 13. Canopy Options
- 14. Canopy Filmover Graphics
- 15. Illuminated Canopy Clark Sign
- 16. Archer Lighting System
- 17. Non-Illuminated Red Stripe
- 18. Universal Pump Skirts

- 19. Dispenser Decal Overview
- 20. Dispenser Decal Overview & Kits
- 21. Gilbarco Encore 500s Dispenser Kit
- 22. Gilbarco Encore 700s Dispenser Kit
- 23. Dresser Wayne Ovation Dispenser Kit
- 24. Gilbarco Encore 300/500 Dispenser Kit
- 25. Dispenser Decals
- 26. Dispenser Product ID Panels
- 27. Regulatory Decals
- 28. Clearance Decals
- 29. Mid Signs
- 30. Monument Signs
- 31. Building Image Treatment
- 32. Entry Door Decals
- 33. Illuminated Building Signs
- 34. Hempel Interior/Exterior Order Form
- 35. Sherwin-Williams Exterior Usage Guide

CLARK COLOR STANDARDS


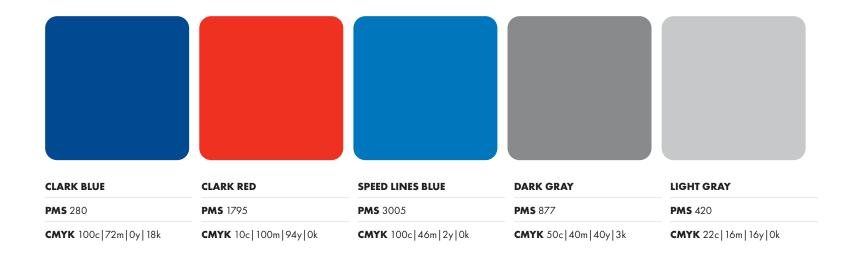


IMAGE INSTALL PHOTO VALIDATION

Items highlighted yellow need to be photographed and returned to Clark Brands RSM. Recommended: Take full head on view of each dispenser





MasterCard

Window Sign

Photograph both sides of each dispenser.

ENTRY DOOR & WINDOW DECALS

DISPENSERS DECAL OVERVIEW



When work is completed, your RSM will validate and sign off that your image project has been completed successfully.

Please provide the RSM photographs that show all sides of canopy, price sign (both sides), all dispensers (both sides), and building. See guidelines in image manual.



Photograph all sides of canopy and both sides of price signs.

IMAGE PARTNERS

Contact us at 877-462-5275 for more details, or answers to questions.



IMAGE PROCESS SUMMARY

New location - Image scope of work

Contact your Regional Sales Manager with questions (send pictures if not done already)

Order materials from Clark Image and Sign Vendors

GRAPHICS:

LSI Industries Luke Clements 713 - 329 - 4058 luke.clements@lsicorp.com Adriana Campuzano 713 - 329 - 4073

adriana.campuzano@lsicorp.com

SIGNS:(Crown Illuminated, LED's, etc)

Everbrite Signs Kristy Edmonds 414 - 529 - 7218 kedmonds@everbrite.com

PAINT:

Hempel Inc. Elida Rodriguez 214-353-1600 elir@hempel.com

Sherwin-Williams Mike Thomas 630-617-1714 DISPENSER DOOR SKINS & PPI SPECIAL DISPENSER DECALS:

PPI

Kayla Goldsmith 866-994-9200, ext. 100 ppi@petroleumpartsinc.com or goo.gl/RVagmn

Schedule work with image installer

Advise Regional Sales Manager when image work is completed by sending photos

IMAGE CONVERSION SCOPE OF WORK

MID Signs

- A) Clark approved signs will be installed.
- B) Pole(s) will be painted Clark light gray.
- C) Midgrade product name is Extra.
- D) Order product panels if needed.

Canopy

- A) Fascia will be filmed with Clark red on top, or illuminated stripe, and the balance of the fascia is sapphire blue.
- B) Two backlit illuminated Clark canopy logos will be installed.
- C) Canopy columns will be painted Clark light gray.
- D) Clearance decals shall be clearly displayed in each direction.

Dispensers

- A) All dispensers will hove Clark approved image including, but not limited to, pump skirts, pump valences, pump numbers, octane rating, product grade and regulatory decals.
- B) Dispenser curbs shall be painted dark gray (if not painted then not necessary to paint).
- C) Dispenser guard poles and/or bollards will be painted Clark light gray.
- D) Pump topper frames and inserts will be installed on the top of the pump.

Building - Required

- A) The entry door decal will be installed on the front door
- B) The MasterCard window sign will be installed on either side of the front door on entry.

Building - Review options with your Regional Sales Manager

- A) The building exterior walls will be painted Clark light gray if already painted. (If not painted, then not necessary to paint.)
- B) Building curbs will be painted Clark dark gray (if not painted then not necessary to paint).
- C) Building fascia shall be red, sapphire blue. or light gray if possible.

Miscellaneous

A) All perimeter poles, air tower poles, etc. will be painted Clark light gray.

NOTE: Variations from the standard Clark Image Program will require approval from your Regional Soles Manager.

WHAT IT TAKES TO BECOME A CLARK STORE

6 Weeks Prior to Opening

- Schedule site survey
- Ask sign company if there are any zoning or permit restrictions per local ordinance
- Any construction concerns, such as building, fuel islands or parking lot?

5 Weeks Prior to Opening

- Make a final decisions on sign company
- Make a final decision on equipment company
- Send surveys and order materials (allowing a 3-4 week window for delivery)
 - o Sign, MID sign, canopy
- Schedule any construction that needs to take place
 - o Entry ways to site, building upgrades, fuel islands, MID sign, electrical

4 Weeks Prior to Opening

- Follow-up on all ordered materials ensure they are on-time
- Order Clark decals
- Order dispenser decals
- If the location already has an account with Fuelman, notify Fuelman of the change
 - o If the location does not have an account, but would like to accept Fuelman please reach out to 1-800-877-9019, press 2 to be setup

3 Weeks Prior to Opening

Schedule tech visit

2 Weeks Prior to Opening

- Begin installation of canopy, building, MID sign
- Final paint

WHAT IT TAKES TO BECOME A CLARK STORE

1 Week Prior to Opening

- Apply Clark entry door and MasterCard window decals
- Apply all dispenser decals
- If the location will be processing over the internet, please order the PaySafe Firewall through ControlScan, by going to clarkbrands.spgnow.com or by calling 800-393-3246, Option 3

1 Week After Opening

- New store kit will be sent directly to the store
- Final install of pump toppers
- Install new store kit items

Within 30 Days of Opening


• Provide completed image install photo validation to Regional Sales Manager. See page 4.

Within 90 Days of Opening

- PCI-DSS enrollment information from our vendor Aperia will be sent to you.
 - o Our PCI Apply application is accessible at pciapply.com/clarkbrands
 - o Login information has been sent to the dealer email provided on the Exhibit C
 - o If you have any questions or need login assistance, please call 877-462-5275 or email customerservice@clarkbrands.com




GENERAL SITE TREATMENT

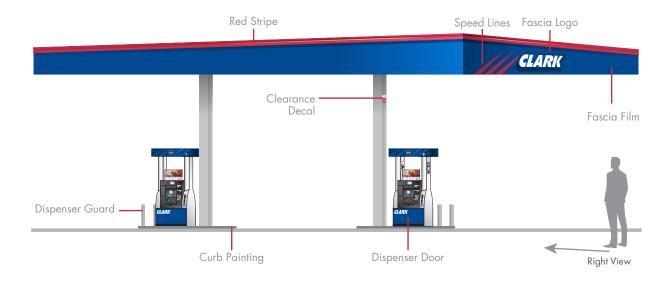


CLARK BRANDS EXTERIOR FINISH USAGE GUIDE		
Application	Color	
Dispenser Guard	Clark Light Gray	
Curb Painting	Clark Dark Gray	
Canopy Ceiling	Clark White	
Columns & Poles	Clark Light Gray	





CANOPY FASCIA ELEVATIONS

Preferred Image - Street Justified Logos on Canopy Left and Right Sides









Left Elevation (Street Justified)


Front Elevation (Faces Street)

Right Elevation (Street Justified)






CANOPY LOGO PLACEMENT

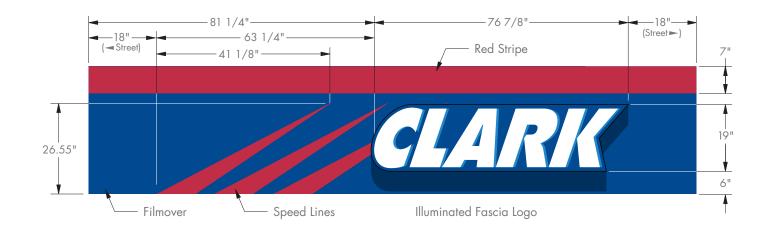


CANOPY OPTIONS


Illuminated Red Stripe and Logo Sign

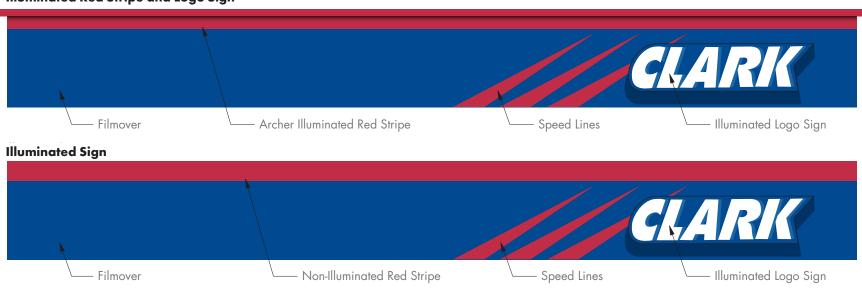

CANOPY FILMOVER GRAPHICS



Clark Sapphire Blue - used on 4' canopies Item No. 169295



Clark Sapphire Blue - used on 3' canopies Item No. 103208

Product

Vinyl with self-adhesive backing.

Application


Vinyl sheets are to be ordered in quantities sufficient to cover fascia and meet site specific conditions. Sand and prime any rusted areas. Clean all surfaces thoroughly. Install per vinyl installation instructions in this manual. Refer to the canopy or building fascia details in this manual for additional information regarding this material.

Please note, when ordering these items for fascia that is corrugated, add 10% to the overall length of the fascia to accommodate this additional surface area.

ILLUMINATED CANOPY CLARK SIGN

Internally illuminated logo sign and speed lines.

For use on canopy fascia where municipal sign code allows.

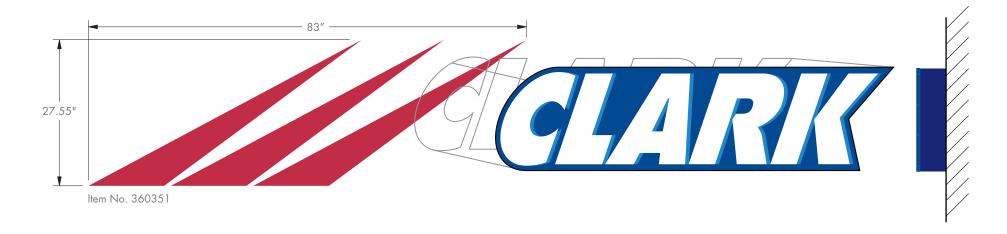

Product

Vinyl with self-adhesive backing.

Clark Red

Application

Apply vinyl speed lines to canopy fascia after the fascia surface is filmed over per instructions included in this manual.

Order in quantities necessary to complete site specific requirements.

Product

19"H x 76.875"L x 5" Deep canopy logo

Background - Sapphire Blue

Drop Shadow - Light Blue

Clark Copy - White


Special Note

Permit requirements of local municipalities may prohibit use of this sign. Prior to placing an order for this sign, ensure your local sign ordinance permits its use.

ARCHER SYSTEM LIGHTING

3.19"

7.66" --

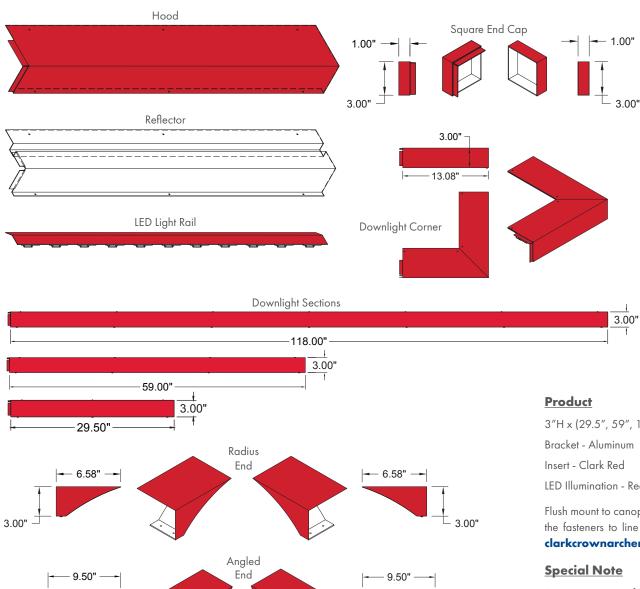

---- 7.66" ----|

Archer Examples





3"H x (29.5", 59", 118")L x 3"

3.00"

Bracket - Aluminum

LED Illumination - Red

Flush mount to canopy face using fasteners suitable for existing canopy structure. Locate the fasteners to line up with existing support structure of the canopy. Go to bit.ly/ clarkcrownarcher for more information.

Special Note

For use on canopy fascia where municipal sign code allows. Permit requirements of local municipalities may prohibit use of this sign. Prior to placing an order for this sign, ensure your local sign ordinance permits its use.

NON-ILLUMINATED RED STRIPE



Clark Red - used with Non-illuminated Red Stripe Options Item No. 360350


Product


Vinyl with self-adhesive backing.

Application

Vinyl sheets are to be ordered in quantities sufficient to cover fascia and meet site specific conditions. Clean all surfaces thoroughly, sand and prime any rusted areas. Install per vinyl installation instructions in this manual. Refer to the canopy or building fascia details in this manual for additional information regarding this material. Please note, when ordering these items for fascia that is corrugated, add 10% to the overall length of the fascia to accommodate this additional surface area.

UNIVERSAL PUMP SKIRTS

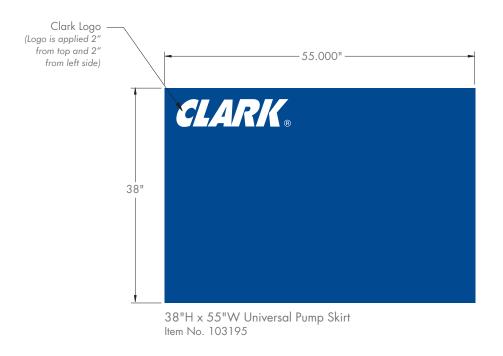

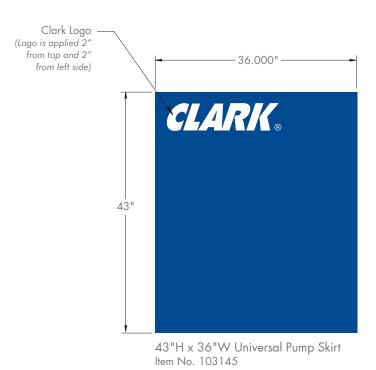

Product

Sapphire Blue vinyl decal with self-adhesive backing.

Preparation


Remove all existing decals and thoroughly clean all surfaces. Sand all edges, copy and scratches from the surface. Sand any rusted areas and prime surface prior to decal application. Install per vinyl installation instructions in this manual.

Application

These dispenser skirts may be trimmed in the field to fit any dispenser models within the recommended ranges indicated.


vv*Logos and Decals purchased separately.

DISPENSER DECAL OVERVIEW

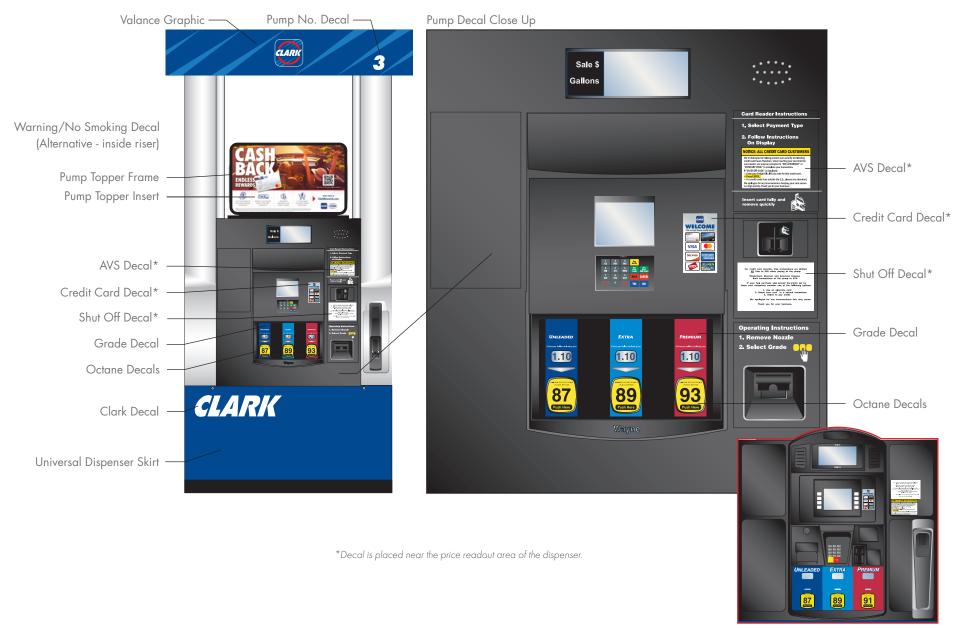

Gilbarco Encore 500s

DISPENSER DECAL OVERVIEW & KITS

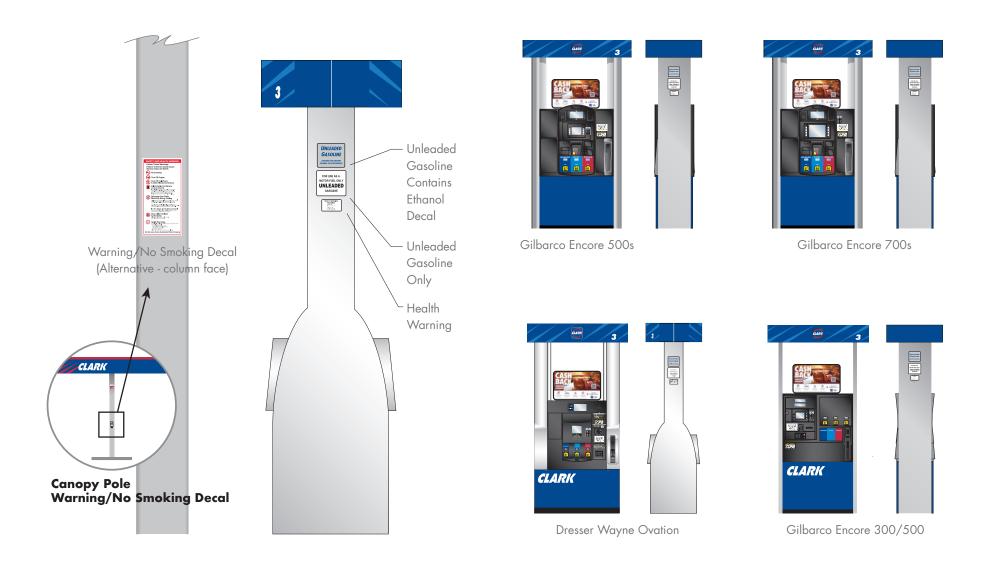

GILBARCO ENCORE 500s Dispenser Kit



Notes on Dispenser Graphics

- Graphics are available for all dispenser types
- Choose appropriate octane and product decals for site specific requirements. You will typically
 use two product ID's and two of each of the required octane
 decals per
 dispenser.
- Place Credit Card decal, AVS decal and Shut Off decal near the price readout
 of the
 dispensers.
- Use 4.8" Clark Logos unless space is limited, then use smaller Logos.
- * Number sets to be ordered as a separate item. Quantities are site specific and should be ordered to meet site specific requirements.

Preparation

Remove all existing decals and thoroughly clean all surfaces. Clean any painted skirts and bonnets. Sand all edges, copy and scratches from the surface. Sand any rusted areas and prime surface prior to decal application. Wipe surfaces with dry towel and then apply vinyl.

Application


For Universal Pump Skirt, apply solid film and trim to fit. Apply Clark logos to the skirts as illustrated. For the Valance, apply film on 4 sides as shown. Then apply pump numbers, product ID's, octane decals, credit card decals, and regulatory decals as illustrated.

Kit Components

Item No.	Qty	Description
375597	2	Valance 60"x13" Logo w/ Speed lines
<i>3755</i> 96	2	Valance 36"x13" Solid Blue
531368	2	3.5"x5.5" AVS Decal
531369	2	3.5"x5.5" Shut Off Decal
Custom*	2	Custom Product IDs
103108	2	4.875"x20.285" Clark Logo For Pump Skirt
103195	1	38"x55" Universal Pump Skirt
Octane		
tN/A	Please cor	itact PPI

Item No.	Qty	Description
205397	1/Site	3" Valance Number Set 1-12
205371	1/Site	3" Valance Number Set 13-24

GILBARCO ENCORE 700s Dispenser Kit

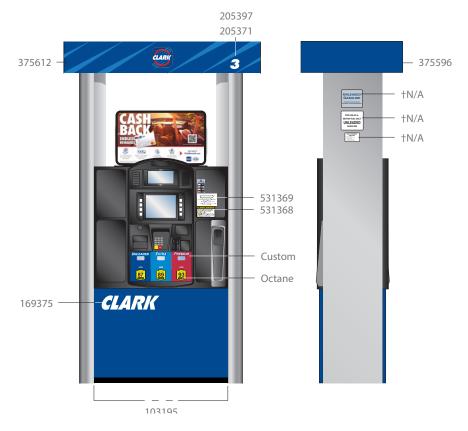

Notes on Dispenser Graphics

- Graphics are available for all dispenser types
- Choose appropriate octane and product decals for site specific requirements. You will typically use two
 product ID's and two of each of the required octane decals per dispenser.
- Place Credit Card decal, AVS decal and Shut Off decal near the price readout
 of the
 dispensers.
- Use 4.8" Clark Logos unless space is limited, then use smaller Logos.
- * Number sets to be ordered as a separate item. Quantities are site specific and should be ordered to meet site specific requirements.

Preparation

Remove all existing decals and thoroughly clean all surfaces. Clean any painted skirts and bonnets. Sand all edges, copy and scratches from the surface. Sand any rusted areas and prime surface prior to decal application. Wipe surfaces with dry towel and then apply vinyl.

Application

For Universal Pump Skirt, apply solid film and trim to fit. Apply Clark logos to the skirts as illustrated. For the Valance, apply film on 4 sides as shown. Then apply pump numbers, product ID's, octane decals, credit card decals, and regulatory decals as illustrated.

Kit Components

Item No.	Qty	Description
375597	2	Valance 60"x 13" Logo w/ Speed lines
<i>3755</i> 96	2	Valance 36"x13" Solid Blue
531368	2	3.5"x5.5" AVS Decal
531369	2	3.5"x5.5" Shut Off Decal
Custom*	2	Custom Product IDs
103108	2	4.875"x20.285" Clark Logo For Pump Skirt
103195	1	38"x55" Universal Pump Skirt
Octane		
tN/A	Please con	tact PPI

Item No.	Qty	Description
205397	1/Site	3" Valance Number Set 1-12
205371	1/Site	3" Valance Number Set 13-24

DRESSER WAYNE OVATION Dispenser Kit



Notes on Dispenser Graphics

- Graphics are available for all dispenser types
- Choose appropriate octane and product decals for site specific requirements. You will typically use
 two product ID's and two of each of the required octane decals per dispenser.
- Place Credit Card decal, AVS decal and Shut Off decal near the price readout
 of the
 dispensers.
- Use 4.8" Clark Logos unless space is limited, then use smaller Logos.

Preparation

Remove all existing decals and thoroughly clean all surfaces. Clean any painted skirts and bonnets. Sand all edges, copy and scratches from the surface. Sand any rusted areas and prime surface prior to decal application. Wipe surfaces with dry towel and then apply vinyl.

Application

For Universal Pump Skirt, apply solid film and trim to fit. Apply Clark logos to the skirts as illustrated. For the Valance, apply film on 4 sides as shown. Then apply pump numbers, product ID's, octane decals, credit card decals, and regulatory decals as illustrated.

Kit Components

Item No.	Qty	Description
375597	2	Valance 60"x13" Logo w/ Speed lines
<i>3755</i> 96	2	Valance 36"x13" Solid Blue
531368	2	3.5"x5.5" AVS Decal
531369	2	3.5"x5.5" Shut Off Decal
Custom*	2	Custom Product IDs
103108	2	4.875"x20.285" Clark Logo For Pump Skirt
103195	1	38"x55" Universal Pump Skirt
Octane		
tN/A	Pleas	e contact PPI

Item No.	Qty	Description
205397	1/Site	3" Valance Number Set 1-12
205371	1/Site	3" Valance Number Set 13-24

^{*} Number sets to be ordered as a separate item. Quantities are site specific and should be ordered to meet site specific requirements.

GILBARCO ENCORE 300/500 Dispenser Kit



Notes on Dispenser Graphics

- Graphics are available for all dispenser types
- Choose appropriate octane and product decals for site specific requirements. You will typically use two
 product ID's and two of each of the required octane decals per dispenser.
- Place Credit Card decal, AVS decal and Shut Off decal near the price readout of the dispensers.
- Use 4.8" Clark Logos unless space is limited, then use smaller Logos.
- * Number sets to be ordered as a separate item. Quantities are site specific and should be ordered to meet site specific requirements.

Preparation

Remove all existing decals and thoroughly clean all surfaces. Clean any painted skirts and bonnets. Sand all edges, copy and scratches from the surface. Sand any rusted areas and prime surface prior to decal application. Wipe surfaces with dry towel and then apply vinyl.

Application

For Universal Pump Skirt, apply solid film and trim to fit. Apply Clark logos to the skirts as illustrated. For the Valance, apply film on 4 sides as shown. Then apply pump numbers, product ID's, octane decals, credit card decals, and regulatory decals as illustrated.

Kit Components

Item No.	Qty	Description
375597	2	Valance 60"x13" Logo w/ Speed lines
<i>3755</i> 96	2	Valance 36"x13" Solid Blue
531368	2	3.5"x5.5" AVS Decal
531369	2	3.5"x5.5" Shut Off Decal
Custom*	2	Custom Product IDs
103108	2	4.875"x20.285" Clark Logo For Pump Skirt
103195	1	38"x55" Universal Pump Skirt
Octane		
tN/A	Please con	tact PPI

Item No.	Qty	Description
205397	1/Site	3" Valance Number Set 1-12
205371	1/Site	3" Valance Number Set 13-24

DISPENSER DECALS

Product

Vinyl decal with first surface screen-printed image. Self-adhesive backing.



Application

Dispenser numbers are site specific and must be installed to meet needs. Placement of the numbers are unique to each dispenser model. See guidelines below for installation on Wayne Ovation dispensers. For other models, refer to the specific dispenser model page for placement of the decals.


for Wayne "Ovation" Valance Valance face: 10"h x 76"w.



Tip of "Speed Lines" should align with top and bottom edges of pump valance. Position graphic to center Hallmark left/right & top/bottom to pump valance. Use PN 375596 to cover remaining approx. 8" of valance at both ends.

Product

Vinyl decal with first surface screen-printed image. Self-adhesive backing.




These decals are intended for use on dispensers with card readers and their use is site specific. When ordering, include quantities sufficient to fulfill the site needs.

Application

Clean all surfaces thoroughly. Sand and prime any rusted areas. Apply vinyl decal to the required area of the dispenser following the vinyl application instructions shown in this manual. Place the Credit Card decal directly above or below any automatic card reader (CRIND) units. For dispenser without CRIND units, usage of this decal is optional.

Product

White vinyl pre-spaced lettering with self-adhesive backing.



Application

Clean all surfaces thoroughly. Sand and prime any rusted areas. Apply vinyl decal to the required area of the dispenser following the vinyl application instructions shown in this manual. Place the Clark logo 2" from left edge and 2" from top edge of pump skirt.



Dispenser Numbering Decal Set

Includes (1) of each number shown.

Clean all surfaces thoroughly. Apply decal to the required area of the dispenser following the vinyl application instructions shown in this manual.

25


DISPENSER PRODUCT ID PANELS

UNLEADED	EXTRA	Premium	SUPER	Ultra
OCTANE	octane	OCTANE	OCTANE	octane
87	89	92 or 93	90°19°92	94
PMS 280	PMS 3005	PMS 1795	PMS 431	PMS 1245
100c/72m/0y/18k	100c/46m/2y/0k	10c/100m/94y/0k	63c/45m/34y/25k	0c/25m/90y/20k

DIESEL	Biodiesel	Off-Road Diesel	KEROSENE	E85	RACING FUEL
					octane 110
PMS 355 100c/20m/100y/0k	PMS 284 50c/5m/0y/0k	PMS 265 53c/70m/0y/0k	PMS 732 40c/75m/90y/40k	PMS Yellow 0c/10m/100y/0k	PMS 238 0c/70m/25y/0k

- Lowest octane gasoline product is labeled Unleaded, and should be 87 octane
- Midgrade octane gasoline product is labeled Extra, and should be 88 or 89 octane
- Highest octane gasoline product is labeled Premium, and should 92 or 93 octane
- For four product sites, the next to highest octane gasoline product is labeled Super
- $\ ^{\blacksquare}$ For three product sites, the valid labels are Unleaded, Extra and Premium
- For four product sites, the valid labels are Unleaded, Extra, Super, and Premium

REGULATORY DECALS

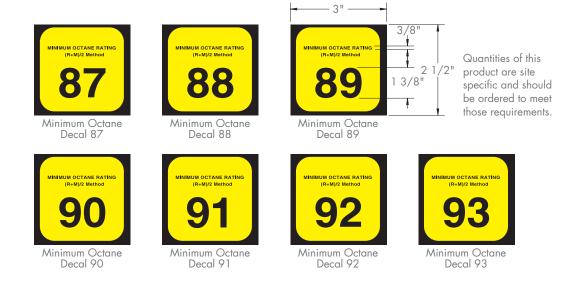

Product

Vinyl decal with first surface screen-printed image. Self-adhesive backing.

Application


These decals are to be installed on each dispenser as described on the individual dispenser pages of this manual.



(1) ea. per dispenser. Item No. 291810

CLEARANCE DECALS

If your canopy clearance is greater than 13'-6", use the 13'-6" clearance decal.



Product

Vinyl with pre-spaced computer cut letters applied.

Each location must accurately measure and provide dimensions for custom clearnace decal implementation.

MID SIGNS

SIDE VIEW


The Clark MID Sign options, ordering instructions and order form are available from Everbrite.

MID Example 1 6' - 13/8" E001943P Logo Sign Pan face, embossed logo FA02648P Face Set (only) 6' - 21/2" SU01827P Chassis (only) E001943P Logo Sign Pan face, embossed logo 5' - 2" FA02648P Face Set (only) SU01827P Chassis (only) 25' 3 LINE E001948P Optional **CHANGEABLE** Reader Board w/3 lines for 6" black font **READER BOARD** 8" x 8" poles ptd. PMS 420 Light Gray POLE SET: PO 00213P 25' OAH

FRONT VIEW

Anchor bolts (set/8)KT01118P


MID Example 2

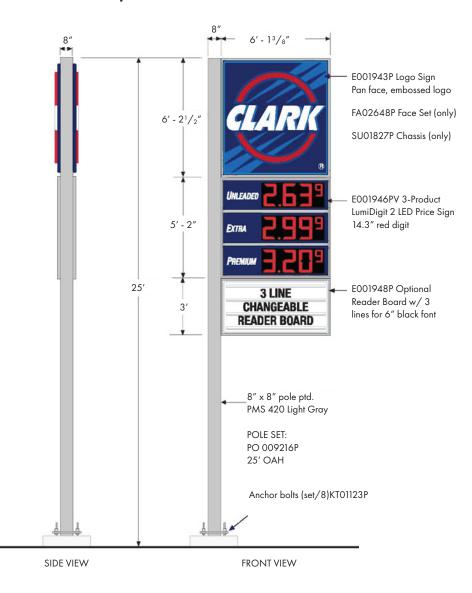

MONUMENT SIGNS

The Clark Monument Sign options, ordering instructions and order form ore available from Everbrite.

Monument Example

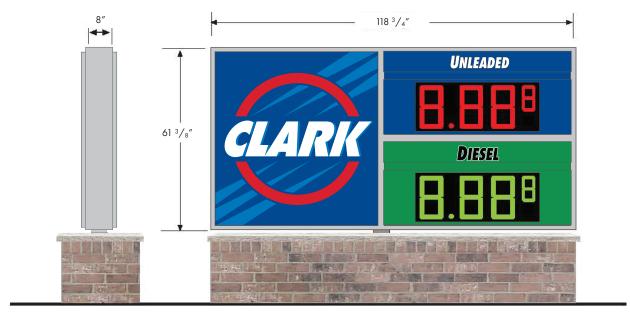

SIDE VIEW FRONT VIEW

SPECIFICATIONS

Cabinet Dimensions: 61.375" x 118.75" Lighting: (10) 60" 5,000K LED light bars Electrical: 3 amps (Digits not Included) Cabinet Weight: Approx. 329 lbs. Square Footage: 50.2934 Sq. Ft.

Pricer: 2 Product LD4 RG pricer **Unleaded Digits:** 14" Red; PMS 288C


opaque background

Diesel Digits: 14" Green; PMS 109C opaque background

Cabinet Color: PMS 420 Light Gray Logo Face: Clark branding specifications; Flat faces (No embossing)

Center pole mounting, pole not included Base by others

BUILDING IMAGE TREATMENT









Walls that are currently non-painted should remain non-painted.

Previously painted walls or columns should be painted Clark Light Gray.


Special Note - All building treatments are site specific. Each building design presents unique features that may or may not be covered in this manual. In the event you encounter an existing condition that is questionable, please contact your Clark Brands Regional Sales Manager for instructions before ordering image elements.

ENTRY DOOR DECALS





Front Side Back Side

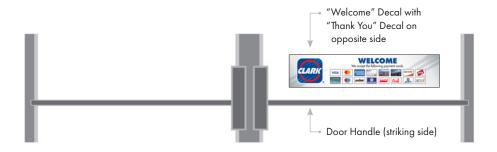

To order Door Decals, please go to shopclarkcrown.com.

Product

Welcome / Thank You Decal - Vinyl with double faced silkscreened image and self-adhesive backing.

Application

Clean glass surface thoroughly. Install per vinyl installation instructions in this manual.

Position decal on right hand entry door with a 2" space between the door handle and the decal. Place above any door handles which cross the entire glass area.

ILLUMINATED BUILDING SIGNS





380963 A - 6'x3'

380963 B - 8'x3'





Interior Exterior Order Form



Bill To: P.O. Site Job

Ship To:

Acct. No.

JB legacy #	Hempel #	Color(s)	Description	Size Qty
A2NS-5010	64DJ9J3030G,75	Clark Blue	Acrylithane HS2 Urethane Satin Gloss	1 - gallon
A2WS-D61240	64DJ9J1822G,75	Light Gray	Acrylithane HS2 Urethane Satin Gloss	1 - gallon
A2N-D60457	57019J1050G,75	Dark Gray	Acrylithane HS4 Urethane Gloss	1 - gallon
45080	5701900010G,72	White	Acrylithane HS2 Urethane Gloss	1 - gallon
A2N-D10290	57019J5156G,75	Clark Red	Acrylithane HS2 Urethane Gloss	1 - gallon
99951	9504100000G,25	Catalyst	Acrylithane HS2 & HS4 Paint Catalyst	1 - qt
Thinners/Reduc	cers			
21102	OBEJB00000G001		Acylithane All Purpose Reducer (temps<72*F)	1 - gallon
21092	0832000000G001		Acylithane All Purpose Reducer (temps>72*F)	1 - gallon
21093	OBBJB00000G001		Acrylithane Retarder (temps>80*F)	1 - gallon
99011	9905600000G,25		Acrylithane Accelerator (temps 35*-50*F)	1 - qt
Primers for Fac	tory Finished ACM &	Canopy Deck Cei	lings	
33010	1504916640G,75	White	Ureprime HS2 Epoxy Urethane Primer	1 - gallon
99951	9504100000G,25	Catalyst	Catalyst for Ureprime Primer	1 - qt
Primers/Barrie	r Coats for Stonex, B	rick, Galvanized I	Metal & Aluminum	
3091	181JB1L010G001	Gray	Multi-Grip 2 Acrylic Latex Primer	1 - gallon
	181JB1L010G005	Gray	Multi-Grip 2 Acrylic Latex Primer	5 - gallon
3090	181JB1L000G001	White	Multi-Grip 2 Acrylic Latex Primer	1 - gallon
	181JB1L000G005	White	Multi-Grip 2 Acrylic Latex Primer	5 - gallon
Primers/Barrie	r Coats for Previousl	y Painted Surface	5	
1500-077	123JB1L000G001	White	Multi-Purpose Alkyd Primer	1 - gallon
	123JB1L000G005	White	Multi-Purpose Alkyd Primer	5 - gallon
1560-032	123JB1L010G001	Gray	Multi-Purpose Alkyd Primer	1 - gallon
	123JB 1L01 0G005	Gray	Multi-Purpose Alkyd Primer	5 - gallon
Miscellaneous	Alkyd Products for N	lanhole Covers, et	c	
1501-001	523JB1L001G001	White	Stantest Alkyd White	1 - gallon
SHN-5008	523JBJ3494G001	Blue	Stantest Alkyd Safety Blue	1 - gallon
SHN-1008	521JBJ5692G001	Red	Stantest Alkyd Safety Red	1 - gallon
1510-001	523JB2L001G001	Yellow	Stantest Alkyd Safety Yellow	1 - gallon
SBN-4000	523JBJ4477G001	Green	Stantest Alkyd Safety Green	1 - gallon

Hempel Contact Information: Elida Rodriguez 214-353-1604 elir@hempel.com

SHERWIN-WILLIAMS EXTERIOR USAGE GUIDE

Please Contact Mike Thomas at (630) 617-1714 for your nearest Sherwin-Williams representative.

CLARK BRANDS SHERWIN-WILLIAMS EXTERIOR FINISH USAGE GUIDE (FOR NEW SUBSTRATES ONLY)		
APPLICATION	PRIME COAT	MID/FINISH COAT
Concrete - Vertical Poured in Place, Tilt Up S-W SherCryl HPA Semi-Gloss, B66-350 Series	S-W Loxon Masonry Primer, A24W8300	S-W SherCryl HPA Semi-Gloss, B66-350 Series
Metal - Aluminum/Galvanized	S-W SherCryl HPA Semi-Gloss, B66-350 Series	
Metal - Ferrous, Iron, Ornamental Iron,	S-W Pro Industrial Pro-Cryl Universal Primer	S-W SherCryl HPA Semi-Gloss, B66-350 Series
Wood - Siding, Trim, Sash, Hardboard	S-W Exterior Latex Wood Primer, B42W8041	S-W SherCryl HPA Semi-Gloss, B66-350 Series
Drywall - Gypsum Board, Exterior Drywall	S-W Exterior Latex Wood Primer, B42W8041	S-W SherCryl HPA Semi-Gloss, B66-350 Series
Vinyl - Siding EIFS, Synthetic Stucco	S-W SherCryl HPA Semi-Gloss, B66-350 Series	
	Thomas at (630) 617-1714 for your nearest Sherwin-Williare special order. Please allow reasonable lead times for	

- The paints are available at Sherwin-Williams nationwide and their Coatings Representatives are available for site visits to assist in any project.
- Unless otherwise indicated, provide factory-mixed coatings. When required, mix coatings to correct consistency in accordance with manufacturer's instructions before application. Do not reduce, thin, or dilute coatings or add materials to coatings unless such a procedure is specifically described in manufacturer's product instructions. VOCs need to be confirmed by using the products MSDS sheets.
- Where the manufacturer offers options on primers for a particular substrate, use primer categorized as "best" by the manufacturer.

SHERWIN-WILLIAMS ORDER PROCESS

1. Pre-order paint ahead of time so it is ready when you arrive.

- > Find a Sherwin-Williams location; over 4,200 stores across the country.
- https://www.sherwin-williams.com/storelocator
- Locate your nearest store and phone number to pre-order paint or visit a store for mix on demand material while you wait.

2. National Program Selections

> Reference to Store Personnel: Clark Brands LLC- National Account, Parent Number 5500. Store personnel will then look up above colors and products along with identifying a Clark Brands LLC Non-Credit Account (5539-5850-5) for pricing on their Source-Client Management System.

3. Materials

> To reference Clark colors and products for all substrates (concrete, metal-aluminum/ galvanized, metal-ferrous, wood and drywall (gypsum boardexterior) your Sherwin-Williams paint consultant will help select the primers, paints and supplies needed to complete your project.